XS-L830
8″ Subwoofers

XS-L1030
10″ Subwoofers

XS-L1230
12″ Subwoofers

- 8″/10″/12″ Compound Polypropylene Cones
- Santoprene Rubber Surround (not inc. L830)
- Dual Damper Suspension
- Small Sealed Enclosure Optimized
- Gold-Plated Binding Post Wire Terminal
- 350 W/400 W/450 W Max Power Handling

Specifications

Speaker

XS-L830
Woofer: 20 cm (8 in.), Polypropylene Cone Type
XS-L1030
Woofer: 25 cm (10 in.), Polypropylene Cone Type
XS-L1230
Woofer: 30 cm (12 in.), Polypropylene Cone Type

Maximum Input Power
XS-L830 350 watts
XS-L1030 400 watts
XS-L1230 450 watts

Rated Input Power
XS-L830 100 watts
XS-L1030 120 watts
XS-L1230 150 watts

Impedance: 4 ohms

Sensitivity
XS-L830 87 dB/W/m
XS-L1030 88 dB/W/m
XS-L1230 89 dB/W/m

Frequency Response
XS-L830 30-4,000 Hz
XS-L1030 25-3,500 Hz
XS-L1230 20-3,000 Hz

Weight (per speaker)
XS-L830 Approx. 2.7 kg (6 lb.)
XS-L1030 Approx. 3.2 kg (7 lb.)
XS-L1230 Approx. 5.2 kg (11 lb. 8 oz.)

Dimensions

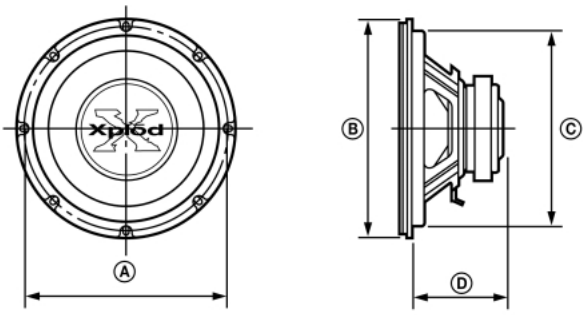

	Ⓐ	Ⓑ	Ⓒ	Ⓓ
XS-L1230	ø295 (11 5/8)	ø310 (12 1/4)	ø279 (11)	134 (5 3/8)
XS-L1030	ø248 (9 7/8)	ø258 (10 1/4)	ø230 (9 1/8)	124 (5)
XS-L830	ø197 (7 7/8)	ø209 (8 1/4)	ø178 (7 1/8)	99.5 (4)

Design and specifications subject to change without notice.